




ATHENA

On A Mission To Save Lives



ATHENA

Space Planning for Entryway Security

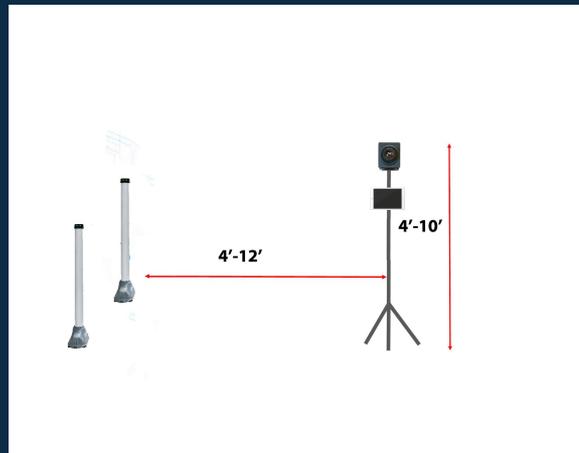

Ipod and thermal camera can be wall, ceiling mounted, or on a tripod.




4 ' to 12' from Poles to iPad/Thermal
iPad/Thermal can be mounted 4' to 10' high

No moving metal within 30" of poles.



ATHENA

Pole Dimensions

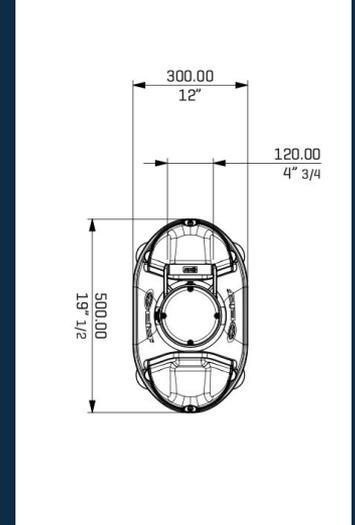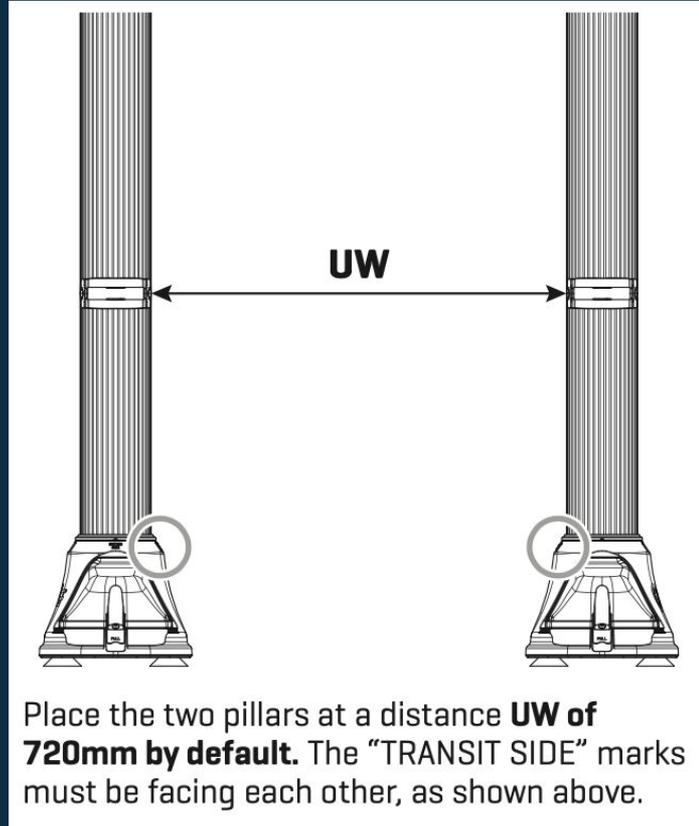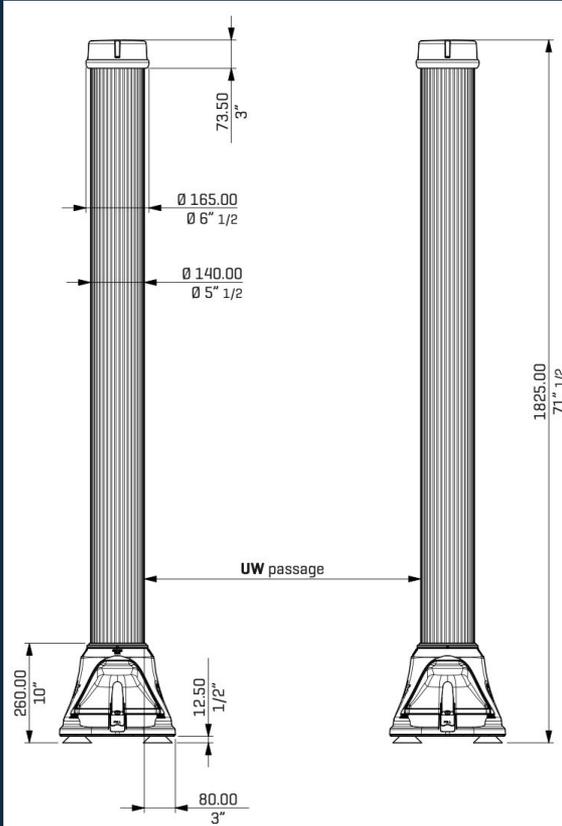



ATHENA

iPad Pro 11" with Thermal Camera



Thermal Camera 2.4" depth x 2.9" height x 2.3 width

Ipad Pro 11" 0.23 depth x 7.02" height x 9.74" width

Camera requires 12 volt DC power supply.

Ipad requires 20w, 5 volt USB C charger to adapter
<https://www.apple.com/ipad-pro/specs/> for more info

Adapter is USBC to USB-C and Network Cable

Mount: As shown with "Caddie-Buddy and C clip" mount,
which is the default mount. 1/4" standard security camera
mount.

Watch a demo of the
entryway security system with a walk through metal detector

Athena-security.com